



Dosita

For long life and high Performance

Hydrosafe Series

Swimming pools and
Jacuzzi circulation pumps



Septinar Mahallesi Arpalik Cad , no 118 block 7 no 5 Basiskele kocaeli Turkey
info@dosita.com.tr 0090 262 502 30 97 www.info@dosita.com.tr



Dosita

Key Features

- Maximum hydraulics performance at rated value
- Quite and noise free
- Stainless steel 316 shaft
- Body of high reinforce PVC material
- Motor and pump wet parts completely separated
- Supplied with pre filter for debries
- Motor totally closed and fan cooled

Operating Conditions

- Voltage 220v 50hz
- I-P65 class F
- Auto reset over load
- Anti clock wise at drive end
- Motor insulation class 105C
- Water temp 5-45 deg C
- Ambient temp max 50 deg C



Application

- Pumps can be used in clean water only
- Swimming pools and jacuzzi
- Cleaning of swimming pools
- Circulation with heating and cooling system

HS033
HS050
HS075
HS100



Dosita

hydrosafe

Range


Dimensions

Model	Hp	Volt
HS033	0.33	230
HS050	0.5	230
HS075	0.75	230
HS100	1.0	230

Model	Dimensions (mm)				
	A	B	C	D	E
HS033	492	225	235	155	160
HS050	492	225	235	155	160
HS075	515	225	235	155	160
HS100	515	225	235	155	160

Flow rate chart

Model	Head-m						
	6	8	10	12	14	16	18
HS033	9	8	7	6	4	-	-
HS050	12	10	9	8	7	5	-
HS075	14	12	11	10	9	8	-
HS100	16	14	13	11	10	8	-

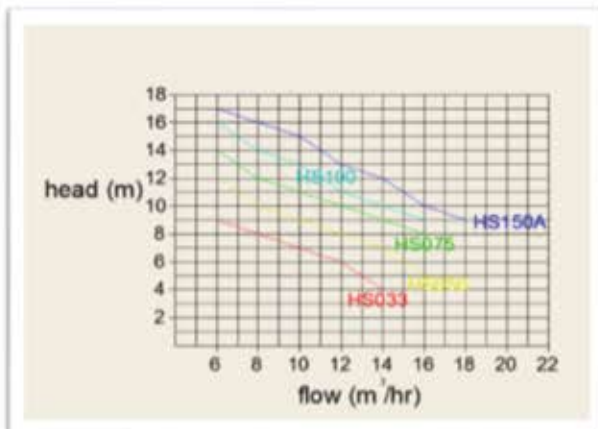

HS150
HS200
HS300



Dosita
hydrosafe

Range

Model	Hp	Voltage (V)
HS150	1.5	230
HS200	2.0	230
HS300	3.0	230

Dimensions

Model	Dimensions (mm)				
	A	B	C	D	E
HS150	570	225	295	180	225
HS200	570	225	295	180	225
HS300	570	225	295	180	225

Flow rate chart

Model	Head-m						
	6	8	10	12	14	16	18
HS150	23	22	21	19	18	16	14
HS200	27	25	24	23	20	18	16
HS300	30	28	26	25	22	21	19

